




HH20 BOM BIKE RACK


Design: HITSÅ

Single or double-sided bike rack
Modular, so can be assembled in the length required
Available vertical (90°) or angled (45°)




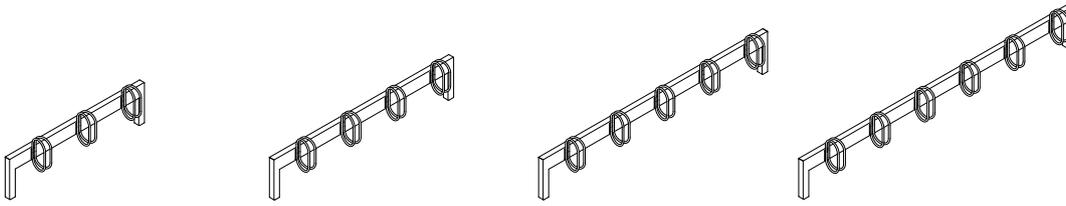


HH20 BOM 500




HH20 BOM 500

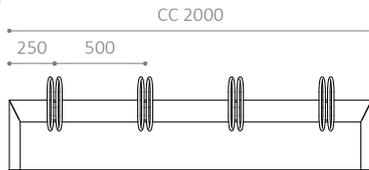

HH20 BOM 500

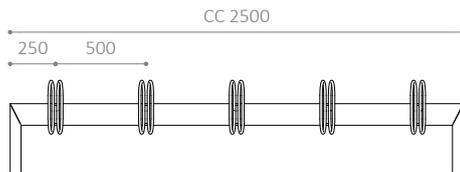

HH20 BOM 500

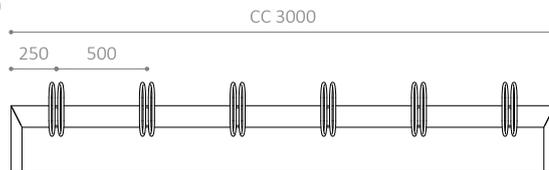

HH20 BOM BIKE RACK

- Single or double-sided bike rack
- Angled clamps that suit all types of tyre
- Allows room for lights on front wheel fork
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel.

DIMENSIONS:

Columns: 60 x 60 mm

Bars: 60 x 120 mm

Clamps: Ø14 mm

Standard distance between clamps: c/c 500 mm



MODULE SIZES:

- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8, 10 or 12 parking spots



INSTALLATION:

- Available for embedding or bolting to the foundation
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 200 mm



HH20 BOM 500 E

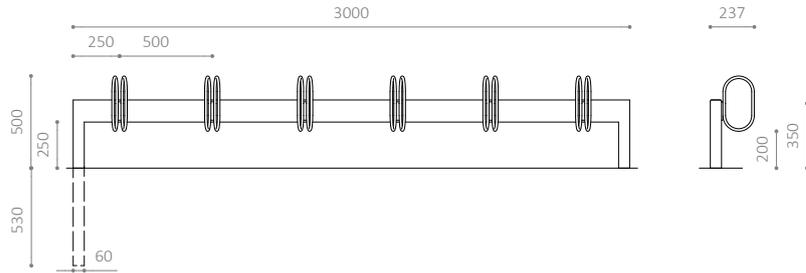



HH20 BOM 500 ES

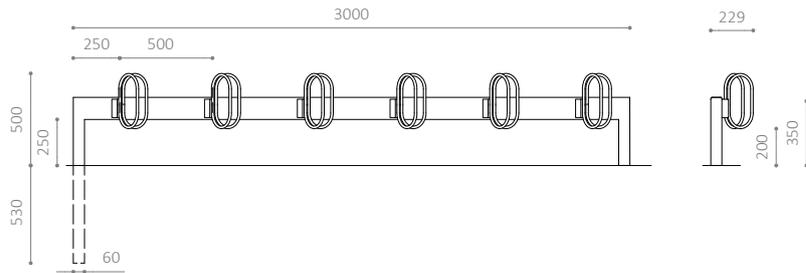

HH20 BOM 500 D

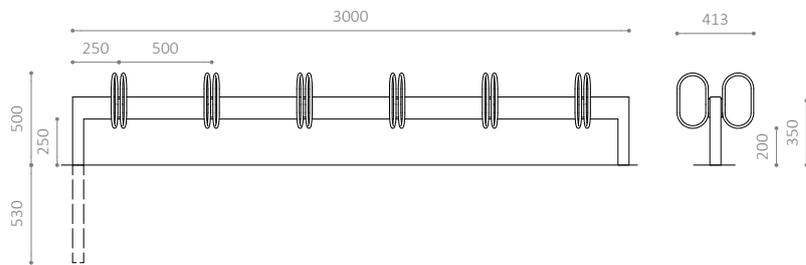

HH20 BOM 500 DS

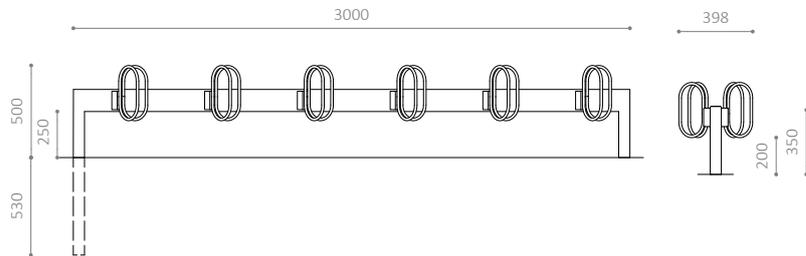

HH20 BOM BIKE RACK

- Single or double-sided bike rack
- Angled clamps that suit all types of tyre
- Allows room for lights on front wheel fork
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel.

DIMENSIONS:

Columns: 60 x 60 mm

Bars: 60 x 120 mm

Clamps: Ø14 mm

Standard distance between clamps: c/c 500 mm

MODULE SIZES:

- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8, 10 or 12 parking spots

INSTALLATION:

- Available for embedding or bolting to the foundation
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 200 mm