



## NOLI BIKE RACK


Design: HJØRRING KOMMUNE

Angled clamps that suit all types of tyre  
Modular, so can be assembled in the length required  
Available vertical (90°) or angled (45°)




HITSA A/S  
Albuen 37  
DK 6000 Kolding  
+45 75 57 41 55  
hitsa@hitsa.com  
www.hitsa.com


**HITSA**  
WE SUPPLY OUTDOOR SPACES

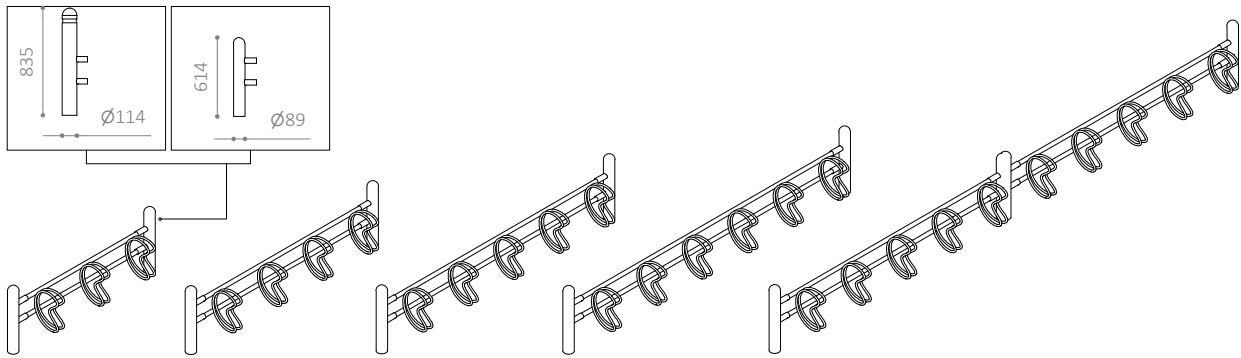


NOLI 500

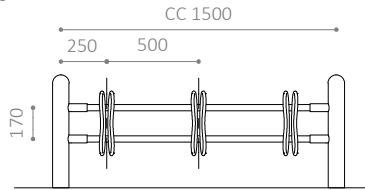


NOLI 500

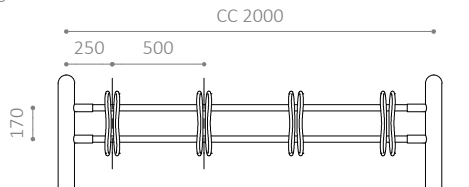

NOLI 500

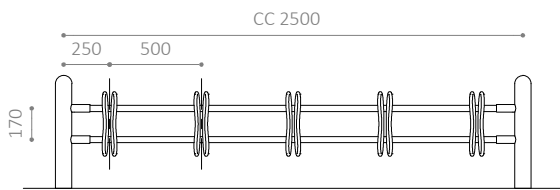

NOLI 500

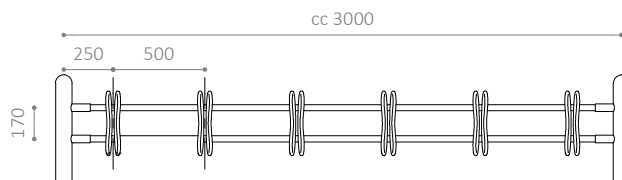

#### NOLI BIKE RACK

- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Optional extra: TRIANGEL or LOCKT lockable bracket
- Also available in any RAL colour

#### MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

#### DIMENSIONS:

Columns without groove: Ø89 mm  
 Columns with groove: Ø114 mm  
 Columns, Snap: Ø42 mm

Bars: Ø33 mm

Clamps: Ø16 mm

Standard distance between clamps: c/c 500 mm


Also available: c/c 600 mm

#### MODULE SIZES:



- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8 or 10 parking spots

#### INSTALLATION:



- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm





Noli 500 E

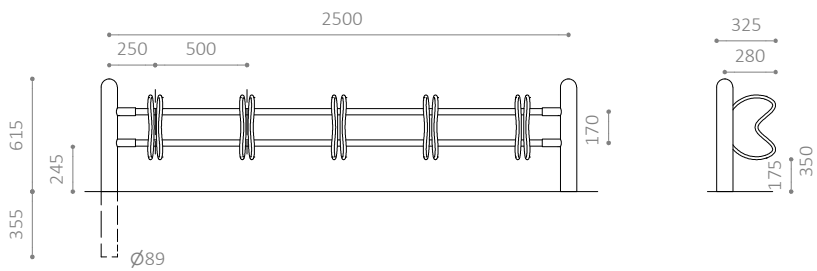


Noli 500 ES

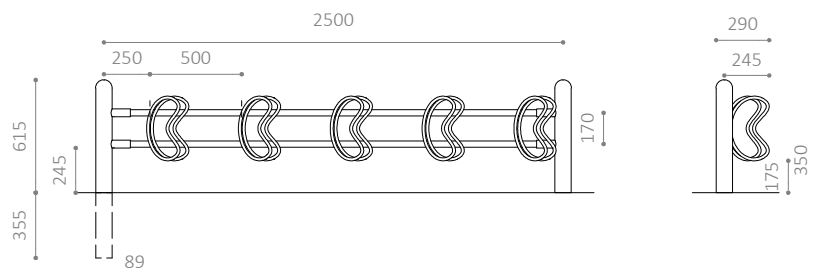

Noli 500 D

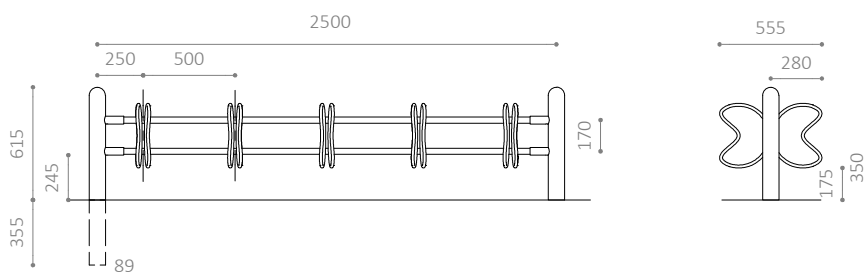

Noli 500 DS

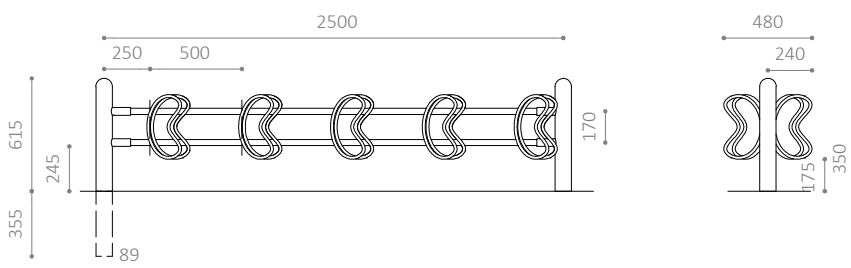

#### NOLI BIKE RACK

- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Optional extra: TRIANGEL or LOCKT lockable bracket
- Also available in any RAL colour

#### MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

#### DIMENSIONS:

Columns without groove:  $\varnothing 89$  mm  
 Columns with groove:  $\varnothing 114$  mm  
 Columns, Snap:  $\varnothing 42$  mm

Bars:  $\varnothing 33$  mm

Clamps:  $\varnothing 16$  mm

Standard distance between clamps: c/c 500 mm

Also available: c/c 600 mm



#### MODULE SIZES:

- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8 or 10 parking spots



#### INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions:  $\varnothing 300$  x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm


Noli 500 V

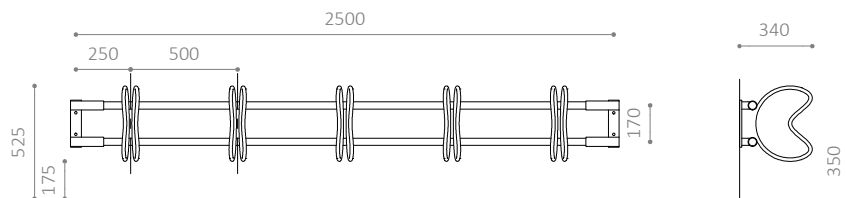


Noli 500 VS

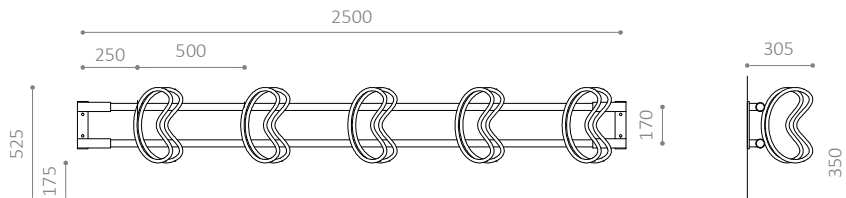

Noli VE

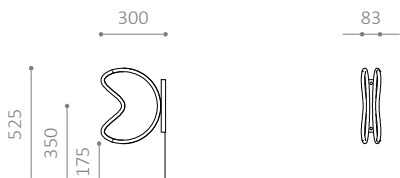

Noli VES

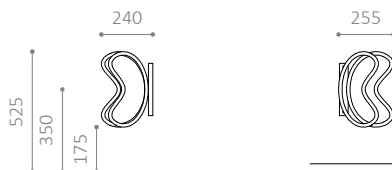

#### NOLI BIKE RACK

- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Optional extra: TRIANGEL or LOCKT lockable bracket
- Also available in any RAL colour

#### MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

#### DIMENSIONS:

Columns without groove:  $\varnothing$ 89 mm  
 Columns with groove:  $\varnothing$ 114 mm  
 Columns, Snap:  $\varnothing$ 42 mm

Bars:  $\varnothing$ 33 mm

Clamps:  $\varnothing$ 16 mm

Standard distance between clamps: c/c 500 mm

Also available: c/c 600 mm


#### MODULE SIZES:

- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8 or 10 parking spots


#### INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions:  $\varnothing$ 300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm

Noli SnapE

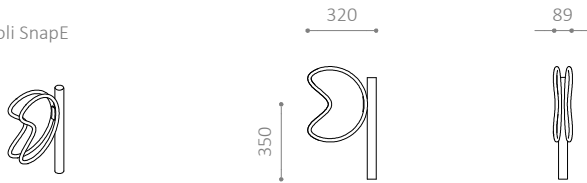

Noli SnapD

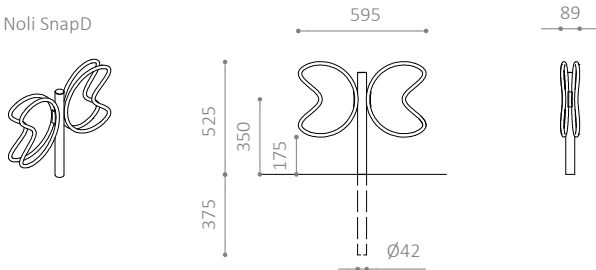

#### NOLI BIKE RACK

- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Optional extra: TRIANGEL or LOCKT lockable bracket
- Also available in any RAL colour

#### MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

#### DIMENSIONS:

Columns without groove: Ø89 mm  
Columns with groove: Ø114 mm  
Columns, Snap: Ø42 mm

Bars: Ø33 mm

Clamps: Ø16 mm

Standard distance between clamps: c/c 500 mm

Also available: c/c 600 mm

#### MODULE SIZES:

- Single-sided: 3, 4, 5 or 6 parking spots
- Double-sided: 6, 8 or 10 parking spots

#### INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm