



NOLI CC600 BIKE RACK


Design: HJØRRING KOMMUNE

Bike rack with extra distance between clamps (c/c 600 mm)


Curved to allow space for lights attached to the front wheel

Optional extra: LOCKT or TRIANGEL lock bracket


Available vertical (90°) or angled (45°)

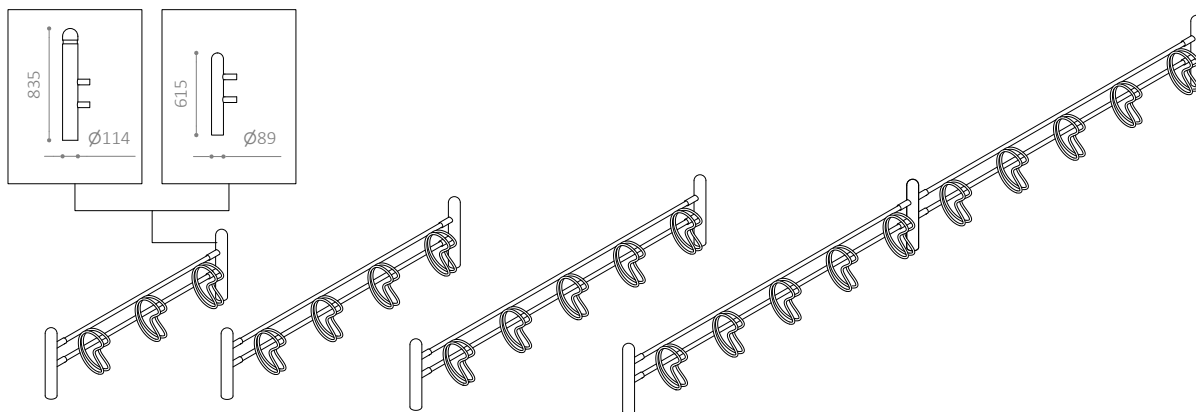


NOLI 600

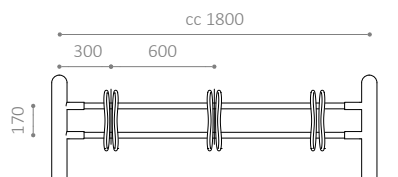

NOLI 600

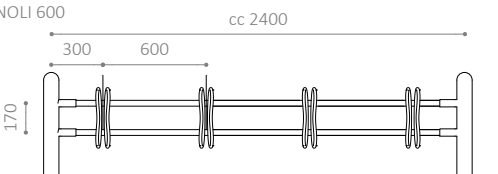

NOLI 600

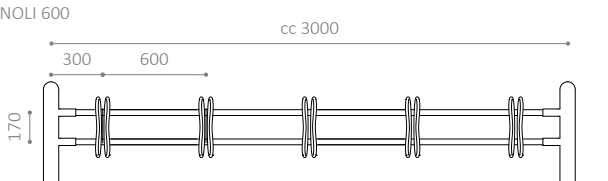

NOLI CC600 BIKE RACK

- Bike rack with extra distance between clamps (c/c 600 mm)
- Optional extra: LOCKT or TRIANGEL lock bracket
- Curved to allow space for lights attached to the front wheel
- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Single- or double-sided
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

DIMENSIONS:

- Columns without groove: Ø89 mm
- Columns with groove: Ø114 mm
- Columns, Snap: Ø42 mm
- Bars: Ø33 mm
- Clamps: Ø16 mm
- Distance between clamps: c/c 600 mm
- Also available: c/c 500 mm


MODULE SIZES:

- Single-sided: 3, 4 or 5 parking spots
- Double-sided: 6, 8 or 10 parking spots


INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm


NOLI 600 E

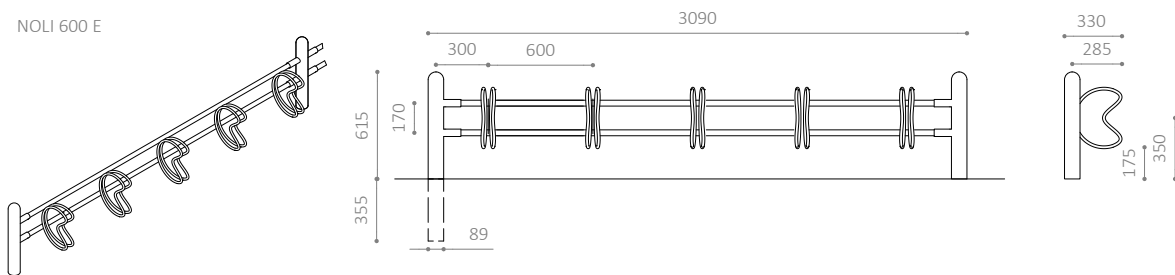


NOLI 600 ES

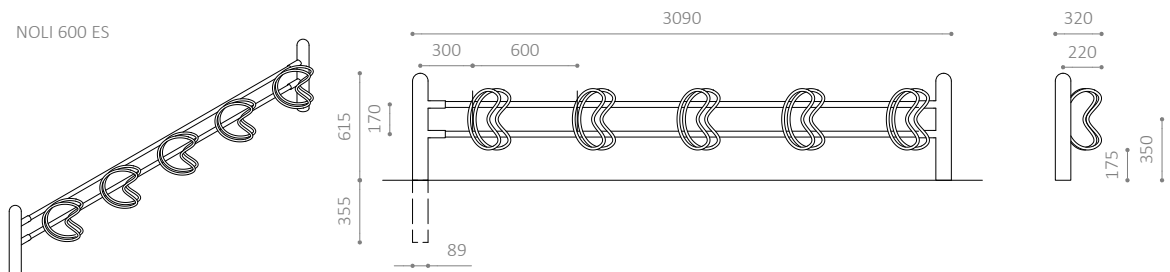

NOLI 600 D

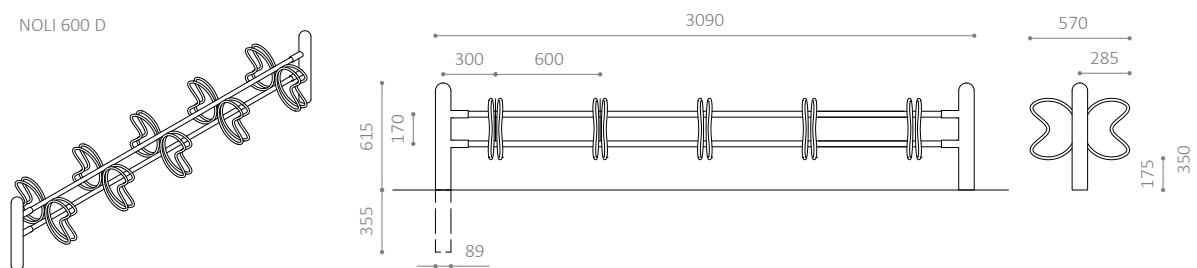

NOLI 600 DS

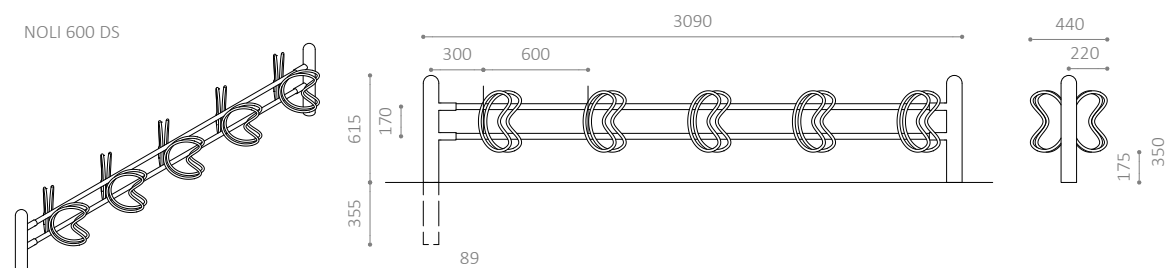

NOLI CC600 BIKE RACK

- Bike rack with extra distance between clamps (c/c 600 mm)
- Optional extra: LOCKT or TRIANGEL lock bracket
- Curved to allow space for lights attached to the front wheel
- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Single- or double-sided
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

DIMENSIONS:

- Columns without groove: Ø89 mm
- Columns with groove: Ø114 mm
- Columns, Snap: Ø42 mm
- Bars: Ø33 mm
- Clamps: Ø16 mm
- Distance between clamps: c/c 600 mm
- Also available: c/c 500 mm


MODULE SIZES:

- Single-sided: 3, 4 or 5 parking spots
- Double-sided: 6, 8 or 10 parking spots


INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm


NOLI 600 V

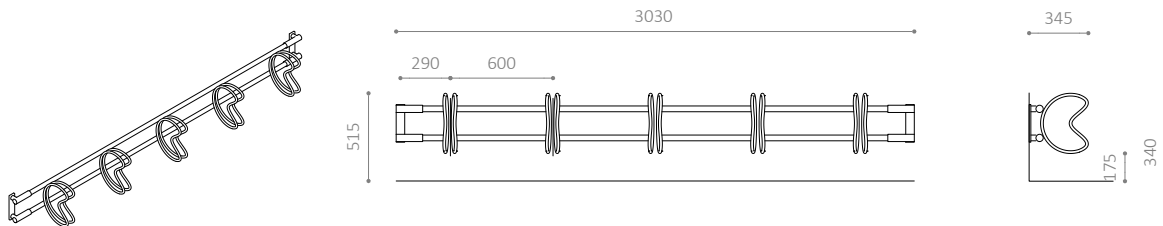


NOLI 600 VS

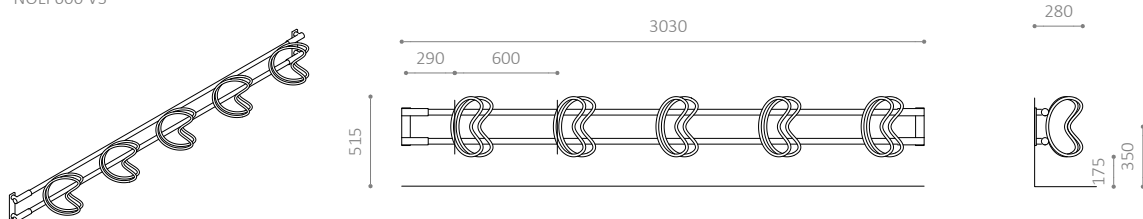

NOLI VE

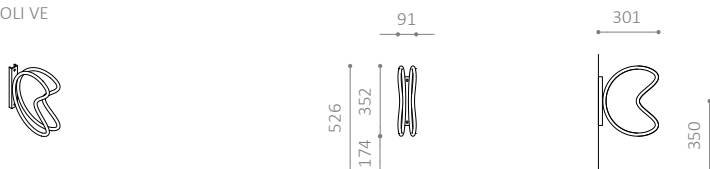

NOLI VES

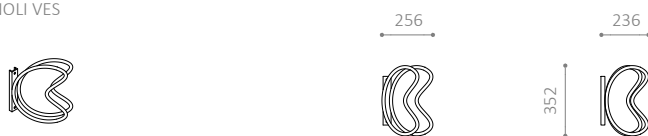

NOLI CC600 BIKE RACK

- Bike rack with extra distance between clamps (c/c 600 mm)
- Optional extra: LOCKT or TRIANGEL lock bracket
- Curved to allow space for lights attached to the front wheel
- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Single- or double-sided
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

DIMENSIONS:

- Columns without groove: $\varnothing 89$ mm
- Columns with groove: $\varnothing 114$ mm
- Columns, Snap: $\varnothing 42$ mm
- Bars: $\varnothing 33$ mm
- Clamps: $\varnothing 16$ mm
- Distance between clamps: c/c 600 mm
- Also available: c/c 500 mm


MODULE SIZES:

- Single-sided: 3, 4 or 5 parking spots
- Double-sided: 6, 8 or 10 parking spots


INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: $\varnothing 300 \times H600$ mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm

NOLI SnapD

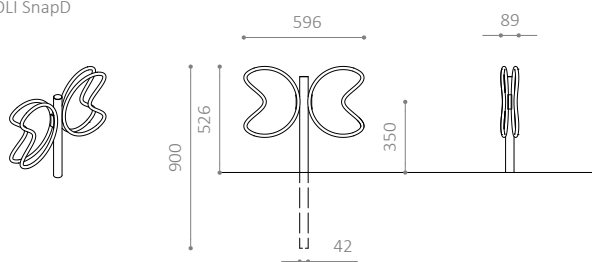

NOLI SnapE

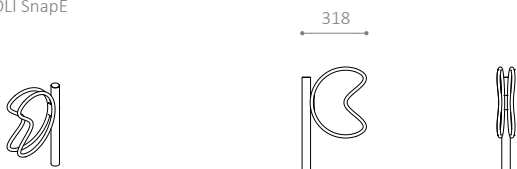

NOLI CC600 BIKE RACK

- Bike rack with extra distance between clamps (c/c 600 mm)
- Optional extra: LOCKT or TRIANGEL lock bracket
- Curved to allow space for lights attached to the front wheel
- Angled clamps that suit all types of tyre
- Modular, so can be assembled in the length required
- Single- or double-sided
- Available vertical (90°) or angled (45°)
- Also available as an individual stand (Snap)
- Also available in any RAL colour

MATERIALS:

- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

DIMENSIONS:

- Columns without groove: Ø89 mm
- Columns with groove: Ø114 mm
- Columns, Snap: Ø42 mm
- Bars: Ø33 mm
- Clamps: Ø16 mm
- Distance between clamps: c/c 600 mm
- Also available: c/c 500 mm

MODULE SIZES:

- Single-sided: 3, 4 or 5 parking spots
- Double-sided: 6, 8 or 10 parking spots

INSTALLATION:

- Available for embedding or bolting to the foundation or wall mounting
- Recommended base dimensions: Ø300 x H600 mm
- Distance from ground to middle of clamp: 350 mm
- Distance from ground to lower edge of clamp: 170 mm