BORCH ELECTRIC-BIKE CHARGING STATION

Design: VE2

Charging for electric bikes
Four 36 V connectors
Part of the BORCH range

HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSA
WE SUPPLY OUTDOOR SPACES

We reserve the right to make minor changes

BORCH

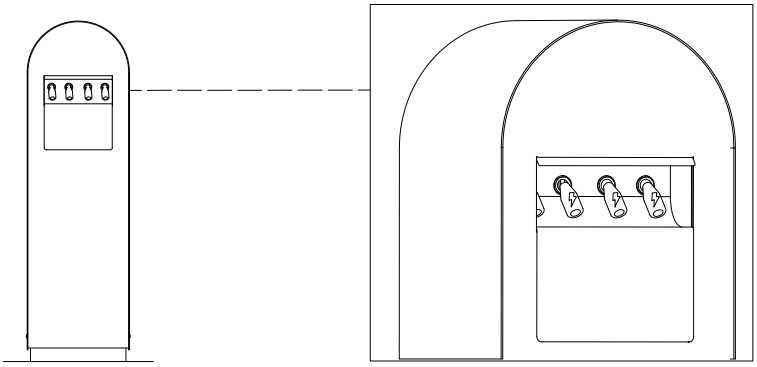

BORCH N

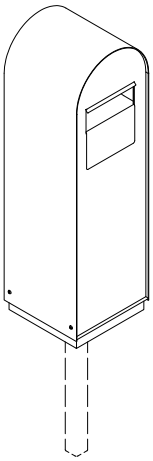

BORCH F

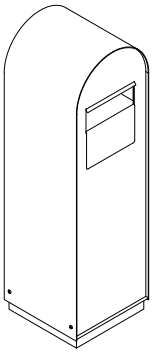

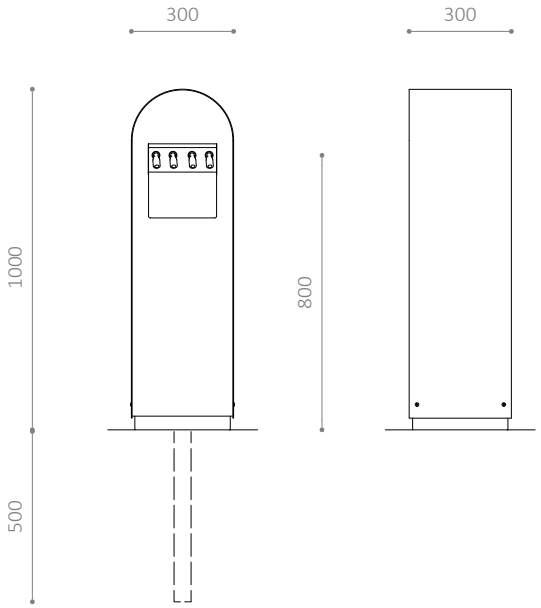

BORCH ELECTRIC-BIKE CHARGING STATION
- Charging for electric bikes
- Four 36 V connectors
- Connectors as standard: BOSCH, Promovec 3-pin, Promovec 4-pin and Phylion 5-pin
- 1,5 meter retractable cable per connector
- Needs authorised 230 V installation
- Coordinates with the BORCH bicycle pump and the BORCH footrest
- Also available in any RAL colour

MATERIALS:
- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel
- Front panel: 2 mm stainless steel plate

DIMENSIONS:
2 mm steel plate

INSTALLATION:
- Can be cemented in or bolted to the ground
- Recommended base dimensions: Ø 300 x H 500 mm
- Connects to 230 V supply according to applicable standards

We reserve the right to make minor changes

HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSA
WE SUPPLY OUTDOOR SPACES

BORCH

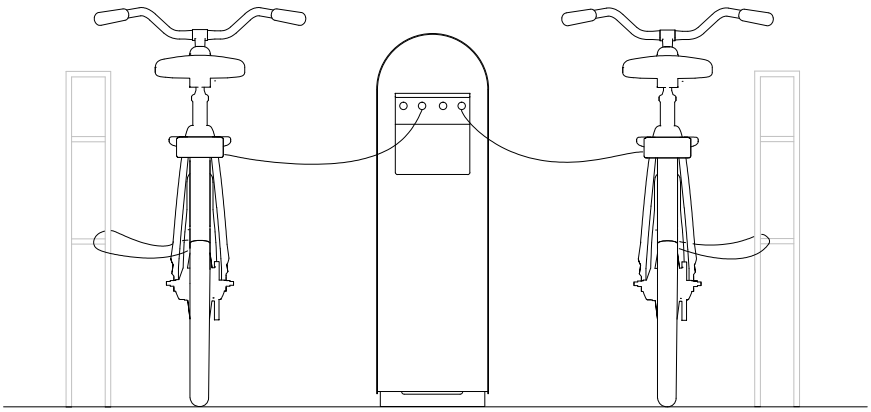

BORCH ELECTRIC-BIKE CHARGING STATION
- Charging for electric bikes
- Four 36 V connectors
- Connectors as standard: BOSCH, Promovec 3-pin, Promovec 4-pin and Phylion 5-pin
- 1,5 meter retractable cable per connector
- Needs authorised 230 V installation
- Coordinates with the BORCH bicycle pump and the BORCH footrest
- Also available in any RAL colour

MATERIALS:
- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel
- Front panel: 2 mm stainless steel plate

DIMENSIONS:
2 mm steel plate

INSTALLATION:
- Can be cemented in or bolted to the ground
- Recommended base dimensions: Ø 300 x H 500 mm
- Connects to 230 V supply according to applicable standards

We reserve the right to make minor changes

HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSA
WE SUPPLY OUTDOOR SPACES