

FHR SHELTER


Design: HITSÅ

Modular – extra bays can be added to extend the shelter
 Can be used as both a bicycle shelter and bin shelter
 Available in 2 sizes

HITSÅ A/S
 Albuen 37
 DK 6000 Kolding
 +45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSÅ
 WE SUPPLY OUTDOOR SPACES

FHR

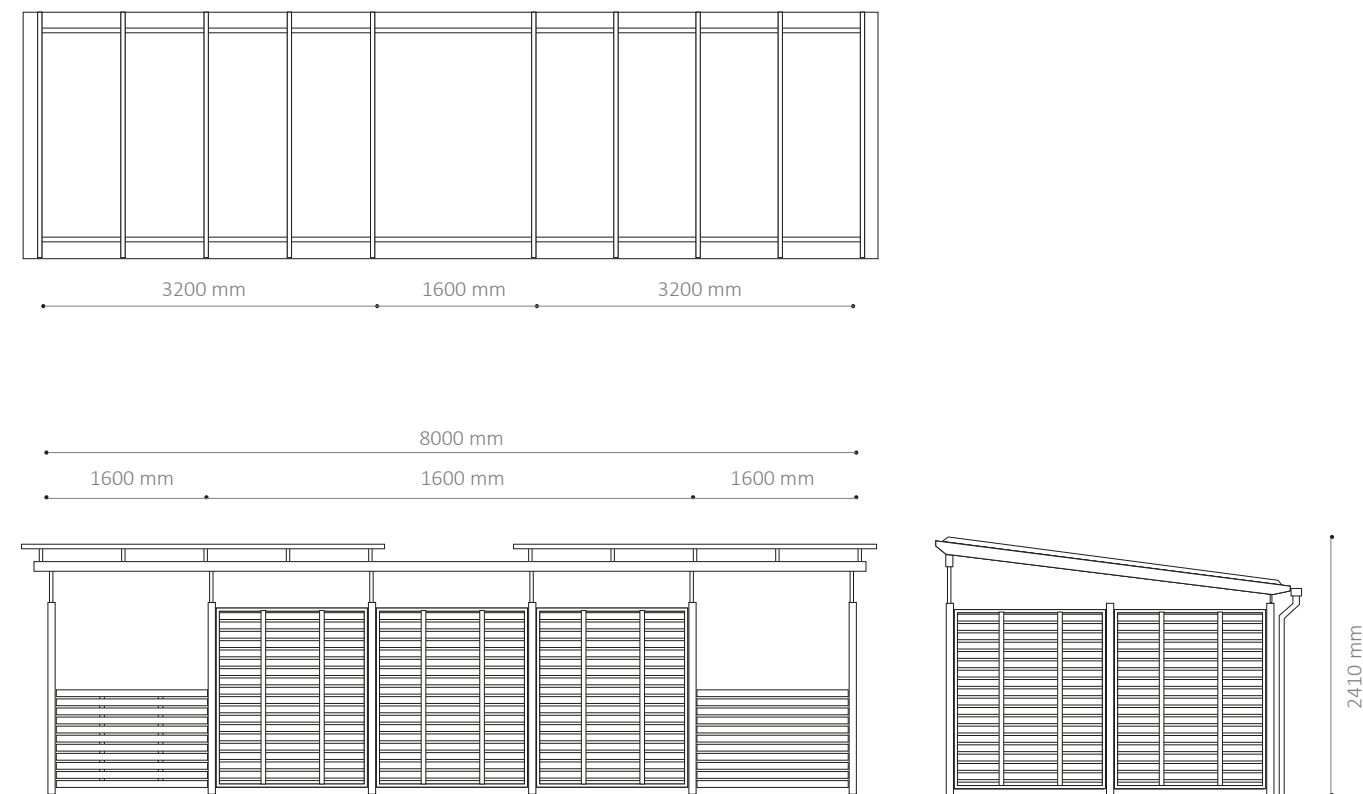

FHR SHELTER

- Modular – extra bays can be added to extend the shelter
- Available in 2 depths: 3400 mm and 2500 mm
- Optional extra: Steel guttering and drainpipe down to the ground
- Optional extra: Side panels, 1-4 sides
- Optional extra: Sliding door(s)
- Optional extra: LED lighting

MATERIALS:

- Hot-dip galvanised steel
 - Also available in powder-coated, hot-dip galvanised steel.
- The following components are not powder-coated: roof panels, guttering, drainpipes and aluminium edge strips, any door rails, etc.

STANDARD ROOF TYPES:

- LP/20 trapezoidal steel panels
- Roofing felt (regular or prepared for sedum roof)

STANDARD PANEL MATERIALS:

- 2 mm Ø 10 mm perforated panels
- 50 x 50 mm wire mesh
- 34 x 68 mm mahogany (FSC®-certified) rhombus profiles, horizontal installation
- 34 x 68 mm thermo ash rhombus profiles, horizontal installation

DIMENSIONS:

Columns: 120 x 60 x 3 mm rectangular profile
Transverse supporting beam: 100 x 50 x 3 mm rectangular profile
Rafters: 100 x 50 x 3 mm rectangular profile

INSTALLATION:

- To be cemented in on site. Installation according to instructions from HITSÅ.

HITSÅ A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSÅ
WE SUPPLY OUTDOOR SPACES