



KNARREBORG SHELTER

Design: HITSA

Modular - several bays can be placed end to end to extend structure



Single or double-sided

Roof in plain steel sheets, clear polycarbonate, roofing felt or prepared for sedum





HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com



HITSA
WE SUPPLY OUTDOOR SPACES

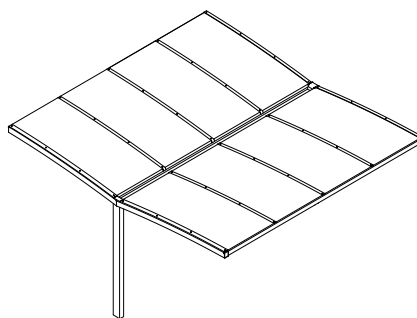

Knarreborg E

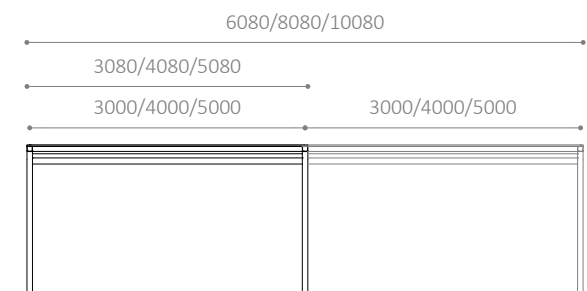

Knarreborg D

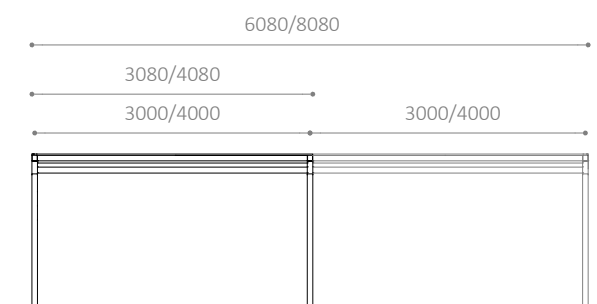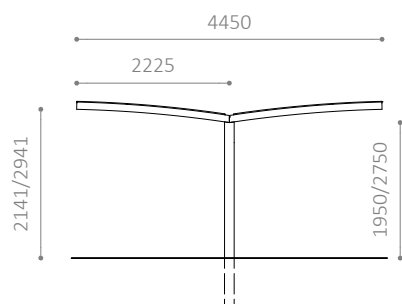

KNARREBORG SHELTER

- Modular – extra bays can be added to extend the shelter (bays up to 5 metres)
- Available as single-sided (depth: 2200 mm) or double-sided (depth: 4450 mm)
- The double-sided shelter comes with integrated steel guttering and drainpipe down to the ground
- Optional extra (for single-sided KNARREBORG): Steel guttering and drainpipe down to the ground
- Optional extra: LED lighting

MATERIALS:

- Hot-dip galvanised steel
 - Also available in powder-coated, hot-dip galvanised steel.
- The following components are not powder-coated: roof panels, integrated guttering and aluminium edge strips

STANDARD ROOF TYPES:

- 1.5 mm smooth steel panels
- 4 mm clear polycarbonate
- Roofing felt (regular or prepared for sedum roof)

DIMENSIONS:

Supports: 140 x 80 x 5/100 x 80 x 4 rectangular profile
Purlins: 50 x 90 x 3 mm rectangular profile
Roof strip: 50 x 3 mm flat steel

INSTALLATION:

- To be cemented in on site. Installation according to instructions from HITSA.