



## SH 500 SHELTER


Design: HITSA

Modular – extra bays can be added to extend the shelter (bays up to 4 metres)

Standard depth 5000 mm

Can be used as both a bicycle shelter and bin shelter



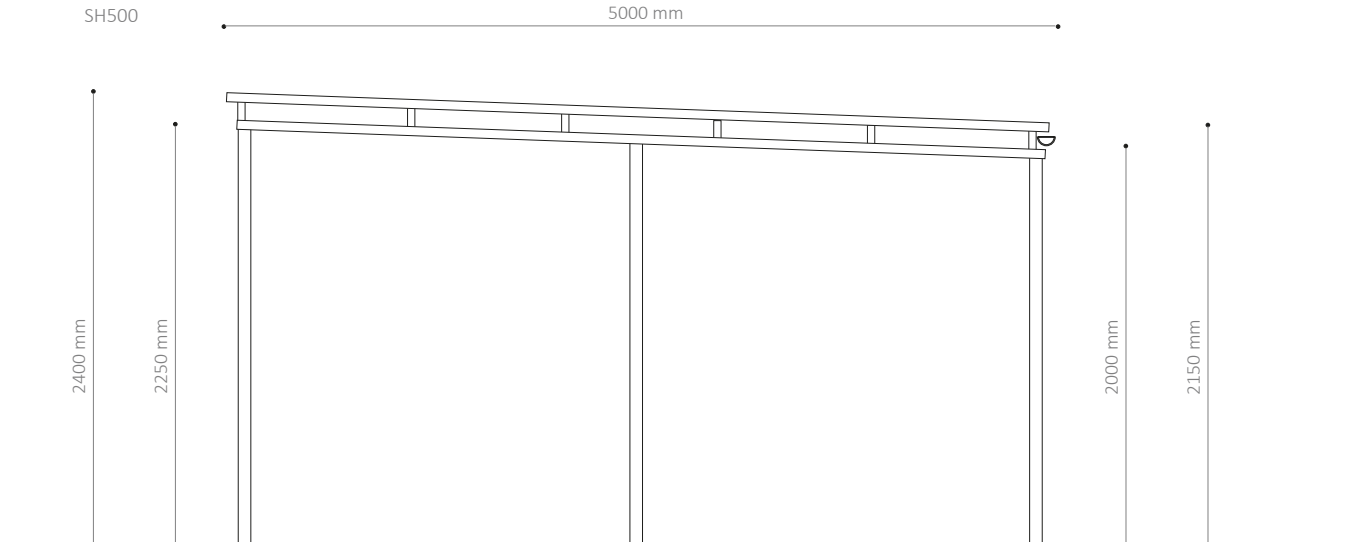

#### SH 500 SHELTER

- Modular – extra bays can be added to extend the shelter (bays up to 4 metres)
- Standard depth 5000 mm
- Optional extra: Steel guttering and drainpipe down to the ground
- Optional extra: Side panels, 1-4 sides
- Optional extra: Sliding door(s)
- Optional extra: LED lighting
- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel.

The following components are not powder-coated: roof panels, guttering, drainpipes and aluminium edge strips, any door rails, etc.

#### ROOF TYPES:

- LP/20 trapezoidal steel panels
- 10 mm polycarbonate corrugated panels/thermo panels
- Roofing felt (regular or prepared for sedum roof)

#### PANEL MATERIALS:

- in frames between columns (MS) or horizontal termination above roof (OT)
- 2 mm smooth steel panels (MS/OT)
- 2 mm Ø10 mm perforated panels (MS/OT)
- 50 x 50 mm wire mesh (MS/OT)
- 34 x 68 mm mahogany (FSC®-certified) rhombus profiles, horizontal installation (MS/OT)
- 34 x 68 mm thermo ash rhombus profiles, horizontal installation (MS/OT)
- 34 x 68 mm mahogany (FSC®-certified) profiles, vertical installation (MS/OT)
- 34 x 68 mm thermo ash profiles, vertical installation (MS/OT)
- 34 x 68 mm larch profiles, vertical installation (MS/OT)

#### DIMENSIONS:

Supports: 70 x 70 x 3 mm / 140 x 70 x 4 mm rectangular profile  
Purlins: 100 x 50 x 3 mm rectangular profile

#### INSTALLATION:

- To be cemented in on site. Installation according to instructions from HITSÅ.