# TYPE B BARRIER

Design: HITSA

Swing barrier
2 latch posts included – suitable for padlocking
The length can be adjusted to suit customer requirements (Max. length B1: 3500 mm) (Max. length B2: 5500 mm)

HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSA
WE SUPPLY OUTDOOR SPACES

TYPE B

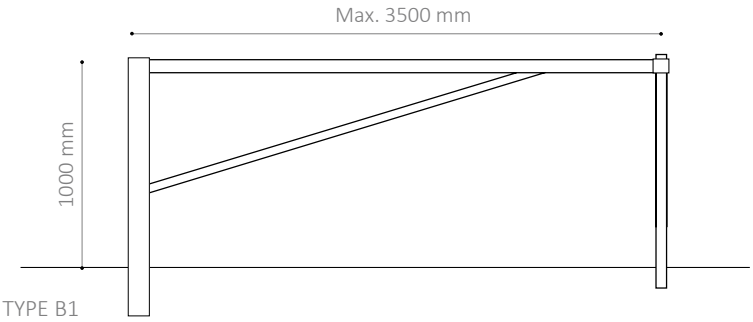


TYPE B1

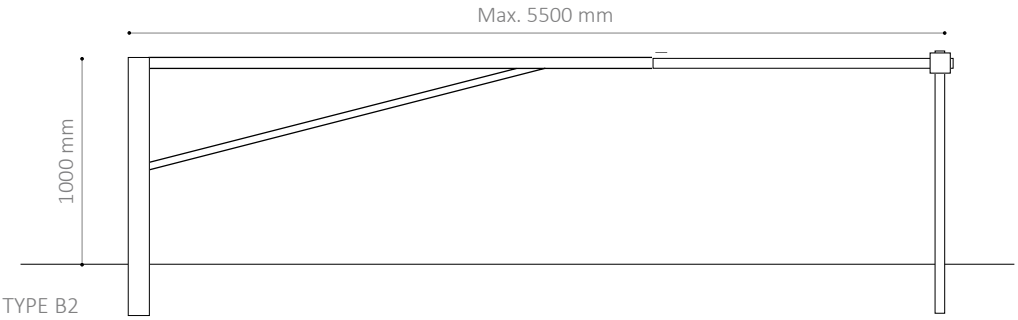


TYPE B2

TYPE B BARRIER
- Swing barrier
- 2 latch posts included – suitable for padlocking
- The length can be adjusted to suit customer requirements
- Max. length B1: 3500 mm
- Max. length B2: 5500 mm
- Optional extra: Red, yellow or white reflective strip
- Also available in any RAL colour

MATERIALS:
- Hot-dip galvanised steel
- Also available in powder-coated, hot-dip galvanised steel

DIMENSIONS:
Barrier arm B1: Ø60 mm
Barrier arm B2: Ø60/48 mm steel tube
Outer post: Ø90 mm steel tube
Inner post: Ø70 mm steel tube

INSTALLATION:
- To be embedded
- Recommended base dimensions: Ø400 x H900 mm
- Recommended base dimensions for latch posts: Ø200 x H600 mm
- Distance from ground to top edge: 1000 mm

We reserve the right to make minor changes

HITSA A/S
Albuen 37
DK 6000 Kolding
+45 75 57 41 55
hitsa@hitsa.com
www.hitsa.com

HITSA
WE SUPPLY OUTDOOR SPACES